

IT-SSD6X-IR

With 4 high power LEDs for a total power consumption of 12W, beam angle 15° to 90°, beam distance 120m to 15m, the IT-SSD6X-IR is a high service of life Camera Housing with built-in IR Illuminator.



- Wavelength 850nm.
- 30.000 hours lifetime LEDs.
- Extended working temperature range -30 to 50°C.
- 1-2 years warranty.
- Packing dimensions 540*265*225mm

Product Family

The IT-SSD6X-IR is part of the High-Power Camera Housing with built-in IR Illuminator series that is the quality LED light source solution for night-time illumination, providing high-power light for CCTV and IP cameras to enhance night-time visual performance with colorful images.

Product Features


- Accurate constant circuit drive develops excellent performance.
- Using high power LEDs to guarantee high efficacy and long service life.
- Full light for night vision camera.
- Indoor/outdoor use.
- Easy installation.

Maintenance

1. Cut off power before maintenance.
2. Clean the glass regular to get better transmission of light.
3. Clean the housing to get well heat dissipation performance.
4. Clean by dry dishcloth, don't use water or strong corrosive solution.


Camera Installation and Adjustment

1. Internal picture

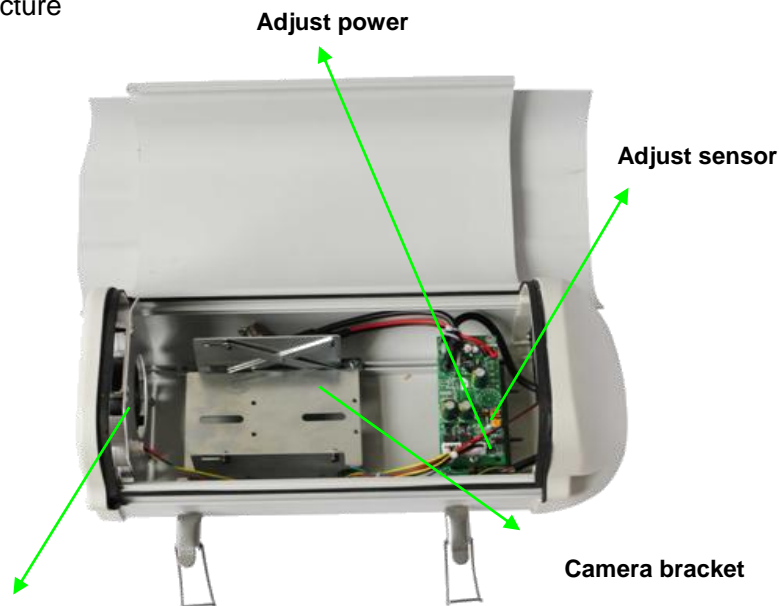



Put on the camera on the lift bracket, adjust the height of camera and fix the screws.

2. Wires

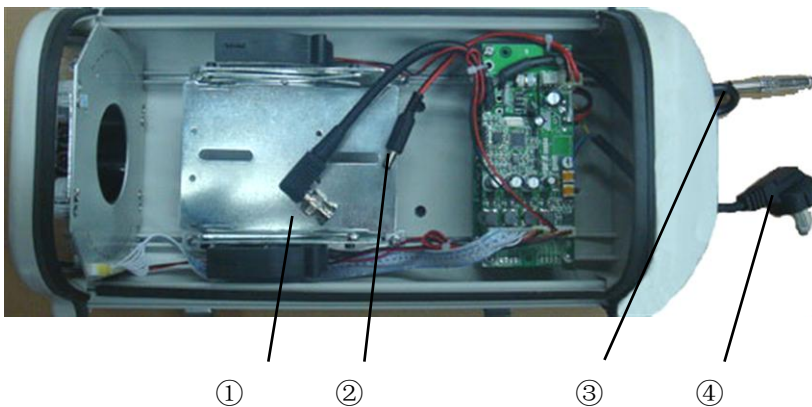


1. BNC Video Signal Wire: Connect to the video signal wire of camera
2. Power Wire: Connect to the power of camera
3. BNC Video Signal Wire: Connect to the monitor.
4. Power Plug: Connect to power source.

3. Dimensions of inside camera

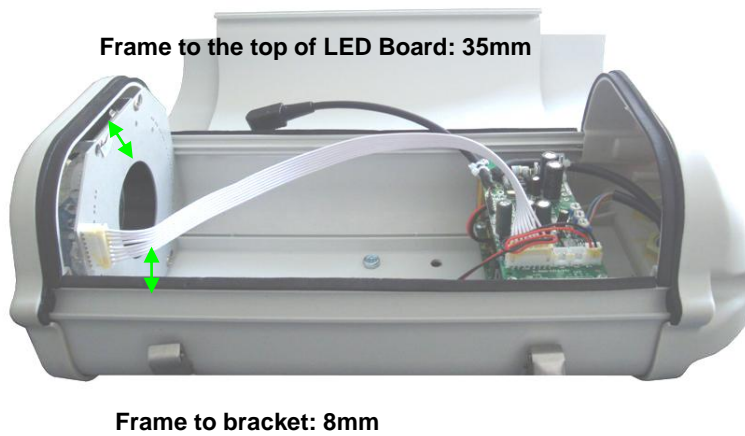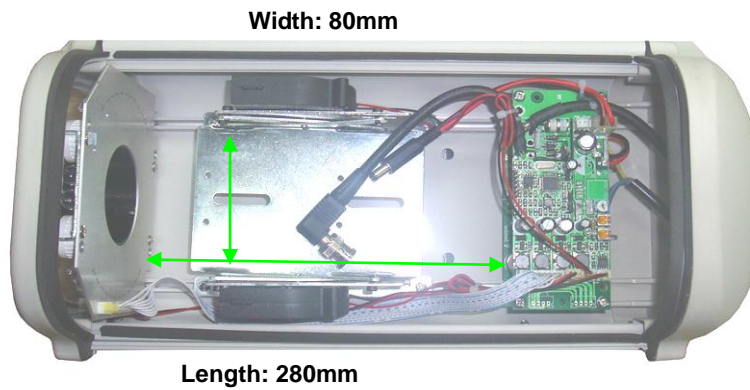

4. Adjustment

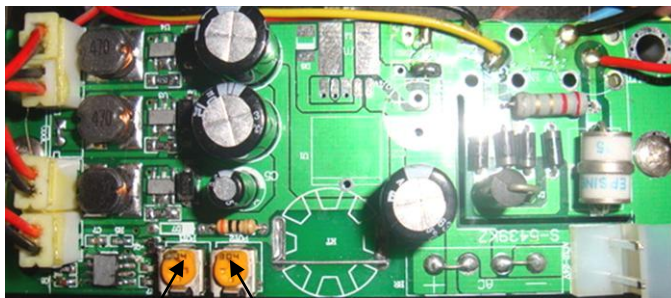

1. Adjust the current of LED PCB, increase current by turn clockwise and decrease by counter clockwise. Increase the current, the power of LED will increase too.
2. Turn counter clockwise to increase the sensitive of CDR sensor.

Camera Housing Installation

- The product includes fragile parts. Take care on every transportation steps and hold carefully, do not stress!
- Ensure operating voltage and current are proper before installation.
- Install the product on the holder by fixing the mount hold with screws directly.
- Adjust the angle of product by loosening screws on bracket.
- Link power wires tightly and make it waterproof to avoid electric shock.
- Connect with extra power wire should make it waterproof at the same.
- The outlet of power wire should be installed downward.
- Don't use against any fire precaution rules during operation.
- Installation requested professional operation and qualified personnel.
- Connect our sales person if you need additional parts for installation.

Technical Specifications

LED type: 4 pieces 2W High Power IR LEDs

Wavelength: 850nm

Beam angle: 15° - 90°

IR distance: 120m - 15m (850nm)

Day & Night switch: CDS 10-20lux \pm 10%

Input voltage: AC110-220V/AC24V/DC12V

Output Voltage: DC12V 1Amp to camera

Power consumption: 12W (850nm)

Power wire: AC110-220V: 1.2m; 12VDC/24VAC: 45cm

Panel: Tempered glass panel

Housing: Aluminum die casting housing

Bracket: Mount bracket

Working temperature: -30°C to + 50°C (-50°C to +50°C with heater)

Protection level: IP65

Color: White

Net weight: 3.3 kg

Gross weight: 4 kg

Packing dimensions: 540*265*225mm

Bracket (optional)

Material: Aluminum Alloy

Size: 360*90*90mm

Net weight: 0.4 kg

Gross weight: 0.7 kg




Models for Selection

| Model | Beam angle | Viewing IR distance |
|----------------|------------|---------------------|
| IT-SSD6X-IR-15 | 15° | 120m |
| IT-SSD6X-IR-30 | 30° | 80m |
| IT-SSD6X-IR-45 | 45° | 60m |
| IT-SSD6X-IR-60 | 60° | 40m |
| IT-SSD6X-IR-90 | 90° | 15m |

**Viewing IR distance is tested by Sony 1/3 CCD Camera and 850nm IR LEDs.*

To achieve the distance needed, please pay attention to your camera specifications and lens before purchase. It is normal phenomenon that distance may vary due to different cameras and lens.

Mechanical Drawings

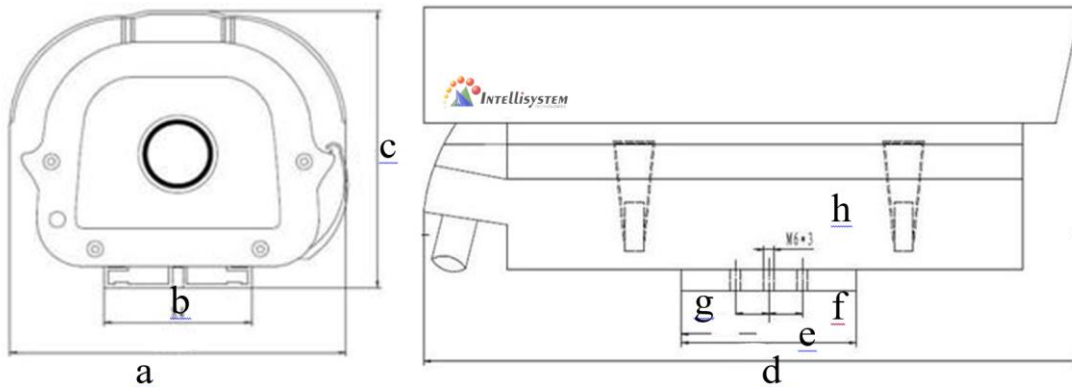

a:172mm b:84mm c:155mm d:480mm e:105mm f:20mm
g: 20mm h: 6mm

Viewing Picture at Night



With IR



Without IR