

# IT-PMC-2000B-R

**RACK for Media Converter**

**(16 slots, 2U, 19 inch)**

## Introduction:

IT-PMC-2000B-R **RACK** for Media converter adapt integration management media converter Rack in machine room. Each Rack have 16 insert slots, can insert 1~16 different media converters module. Redundant Power Supply, support hot-swappable, provide credibility, high effect and economic solutions for network system.



## Packing List:

IT-PMC-2000B-R is shipped with following items.

1. IT-PMC-2000B-R ×1
2. 220V power line ×2
3. User manual ×1

## Features:

1. Adopt insert-draw design, Easy to load and unload, Plug and play, support hot-swappable.
2. 19 inch 2U, easy to install.
3. Each Rack have 16 insert slot, can insert 1~16 different media converter module , high capability, easy to upgrade.
4. Full aluminum metal shell, high shield, high anti-jamming.
5. Adopt auto-adapt technology. Do not adjust electrics and optics when installation.
6. Redundant Power Supply, Low consumption, and credibility.
7. Full working indicator light, easy to maintenance.
8. Average no MTBF is up to 50 thousands , accord to telecom standard.

## Power input:

Adopt double power supply at the same time. Lighten the charge of each power supply, extend the life of the power supply. If one power supply fault, another backup power can supply independence, media converter can work no-stop. When maintain and the power supply is installed, do not draw the media converter card, also do not remove the rack from the tank, just draw fault power supply from the back of the Rack, it is convenience to repair or instead.

**Intellisystem Technologies S.r.l.**

Via Augusto Murri, 1 - 96100 Siracusa - Phone +39 (0)931-1756256 / +39 (0)2-87167549 - Mobile (+39) 335 1880035  
em@il: info@intellisystem.it WEB: <http://www.intellisystem.it>

## Specifications:

### Parameter

Working Temperature: 0°C to 50°C

Storage Temperature: -40°C to 85°C

Relative Humidity: 5% ~ 95%

Dimension: 482.6mm×350mm×88mm (L×W×H)

19 Inch 2U

### Power supply Require

Input: AC 100~260V, 50~60HZV


Out put: DC +5V

Consumption: <60W

Wave: ≤50mv

Noise: ≤50mv

## Dimensions:

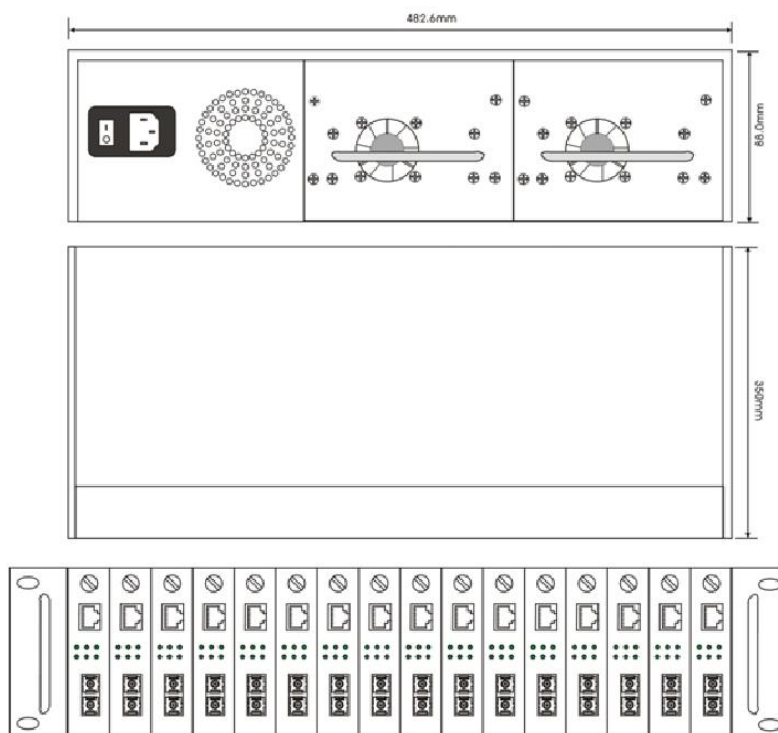

## Certifications:



### Intellisystem Technologies S.r.l.

Via Augusto Murri, 1 - 96100 Siracusa - Phone +39 (0)931-1756256 / +39 (0)2-87167549 - Mobile (+39) 335 1880035  
 em@il: info@intellisystem.it WEB: <http://www.intellisystem.it>