

IT-SS3804-WL

With 4 high power LEDs for a total power consumption of 4W, beam angle 15° to 90°, beam distance 30m to 3m, the IT-SS3804-WL is a high service of life Camera Housing with built-in White Light Illuminator.



- Luminous flux 480lm.
- 30.000 hours lifetime LEDs.
- Extended working temperature range -20 to 50°C.
- 1-2 years warranty.

Product Family

The IT-SS3804-WL is part of the High-Power Camera Housing with built-in White Light Illuminator series that is the quality LED light source solution for night-time illumination, providing high-power light for CCTV and IP cameras to enhance night-time visual performance with colorful images.


Product Features

- Accurate constant circuit drive develops excellent performance.
- Using high power LEDs to guarantee high efficacy and long service life.
- Full light for night vision camera.
- Indoor/outdoor use.
- Easy installation.

Maintenance

1. Cut off power before maintenance.
2. Clean the glass regular to get better transmission of light.
3. Clean the housing to get well heat dissipation performance.
4. Clean by dry dishcloth, don't use water or strong corrosive solution.

Camera Housing Internal Structure

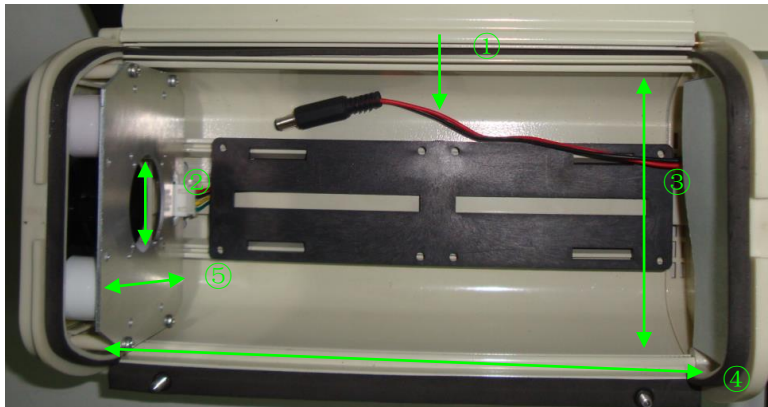

1. **DC12V cable:** Supply to camera
2. **Diameter:** 40mm \pm 1mm
3. **Width of camera:** 90mm \pm 1mm
4. **Length of camera:** 220mm \pm 1mm
5. **Height of camera:** 80mm \pm 1mm

Camera Housing Installation

- The product includes fragile parts. Take care on every transportation steps and hold carefully, do not stress!
- Ensure operating voltage and current are proper before installation.
- Install the product on the holder by fixing the mount hold with screws directly.
- Adjust the angle of product by loosening screws on bracket.
- Link power wires tightly and make it waterproof to avoid electric shock.
- Connect with extra power wire should make it waterproof at the same.
- The outlet of power wire should be installed downward.
- Don't use against any fire precaution rules during operation.
- Installation requested professional operation and qualified personnel.
- Connect our sales person if you need additional parts for installation.

Technical Specifications

LED type: 4 pieces High Power White Light LEDs

Color temperature: Cool white, warm white

Luminous flux: 480lm

Beam angle: 15° - 90°

White light distance: 30m - 3m

Day & Night switch: CDS 10-20 lux \pm 10 %

Input voltage: AC110-220V/DC12V

Output voltage: DC12.3V \pm 5% (supply to camera)

Output current: 400mA \pm 5% (supply to camera)

LED power consumption: 4W \pm 5 % (850nm)

Panel: Glass panel

Housing: Aluminum with plastic housing

Working temperature: -20°C to + 50°C (-50°C to + 50°C with heater)

Protection level: IP65

Color: Beige

Net weight: 1.25 kg

Gross weight: 1.7 kg

Dimensions: 145*370*116mm

Packing dimensions: 160*430*155mm

Bracket (optional)

Material: Aluminum Alloy

Size: 310*98*85mm

Net weight: 0.3 kg

Gross weight: 0.5 kg




Models for Selection

Model	Beam angle	Viewing distance
IT-SS3804-WL-15-W	15°	30m
IT-SS3804-WL-30-W	30°	20m
IT-SS3804-WL-45-W	45°	15m
IT-SS3804-WL-60-W	60°	8m
IT-SS3804-WL-90-W	90°	3m

**White light distance is tested by SONY 1/3" CCD Camera.*

To achieve the distance needed, please pay attention to your camera specifications and lens before purchase. It is normal phenomenon that distance may vary due to different cameras and lens.

Mechanical Drawings

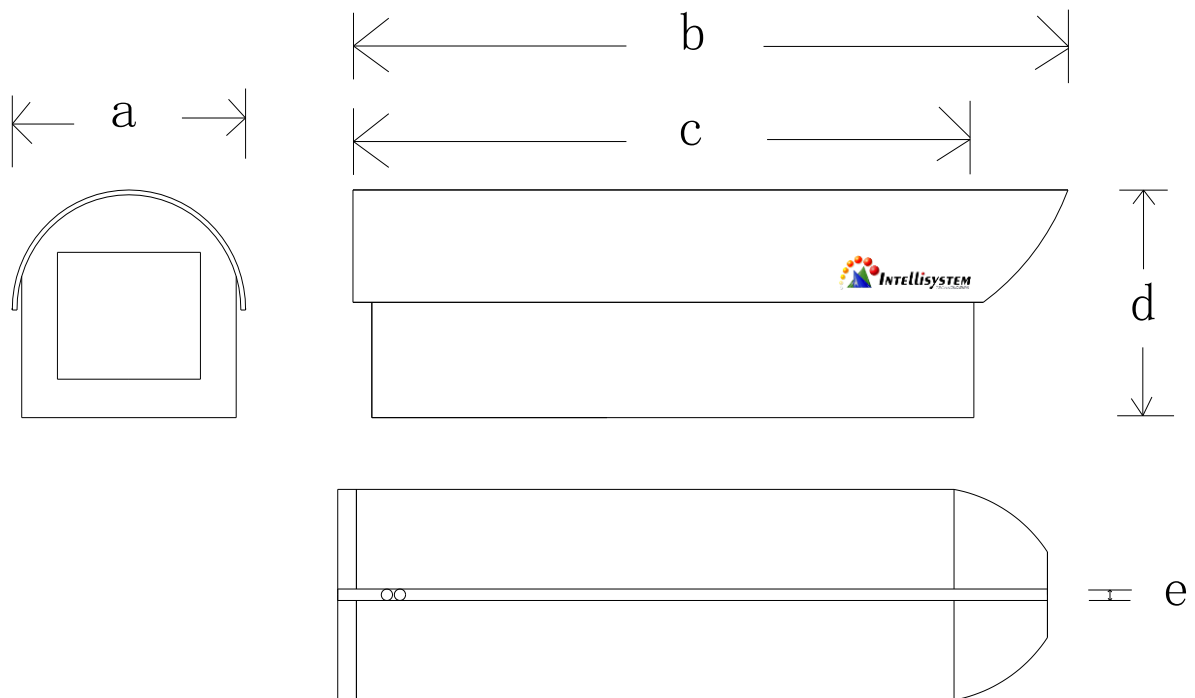

a: 145mm b: 370mm c: 343mm
 d: 116mm e: 6mm

Viewing Picture at Night



With white light



Without white light