

IT-IPMC-101GT-GF-POE

1-port 10/100/1000M Base-T (x) PoE + 1-port 1000Base-FX

Industrial PoE Media Converter

Features

1. Support 1 10/100/1000Base-TX port and 1 1000Base-FX fiber port
2. Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z, IEEE802.3ab, IEEE802.3af/at, store and forward
3. Compatible with both IEEE802.3at(30W) and IEEE802.3af(15.4W)
4. Ethernet port support 10/100/1000M self-adaption and PoE function
5. Support LFP (Link Fault Pass-Through)
6. Support huge increase in packet mode
7. DC48V power input, reverse connection protection
8. IP40 protect grade, high strength iron shell, DIN Rail installation
9. Industrial grade 4 design



1


Introduction

The IT-IPMC-101GT-GF-POE device is a kind of industrial Gigabit PoE media converter, it support 1 10Base-T/100Base-TX/1000Base-TX port and 1 1000Base-FX Fiber port. These converters are classified as power source equipment (PSE), and when used in this way provide up to 30 watts to IEEE802.3af/at compliant powered devices (PDs), eliminating the need for additional wiring. It support LFP function, it is easy to check the network connection status, it also support CE, FCC standard, adopt industry standard

design, IP40 protection, rugged high-strength metal case, power supply input (48VDC), -40 to 60°C working temperature. The converters support IEEE802.3/ IEEE802.3u/ IEEE802.3x/ IEEE802.3ab/ IEEE802.3z with 10/100/1000M, full/half-duplex, and MDI/MDI-X auto-sensing, providing a complete solution for your industrial Ethernet network.

Dimensions

Unit (mm)

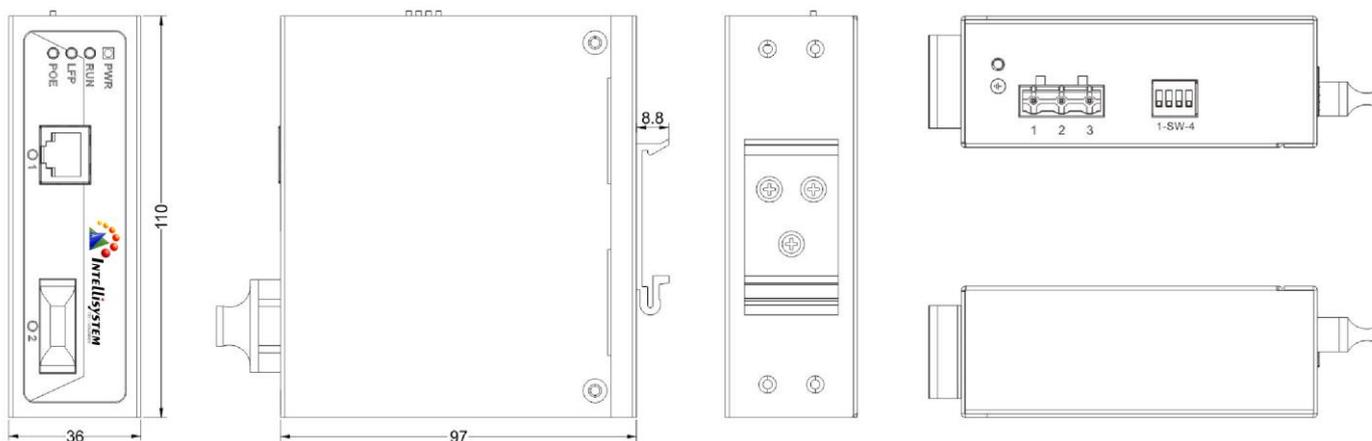

Specifications

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z/ab, IEEE802.3af/at

Flow control: IEEE802.3x flow control, back press flow control

Exchange attributes

100M forward speed: 148810pps

1000M forward speed: 1488100pps

Transmit mode: store and forward

System exchange bandwidth: 12G

MAC address table: 8K

Memory: 1Kbits

Exchange delay time: < 10 μ s

Interfaces

RJ45 port: 10Base-T/100Base-TX/1000Base-TX Self-adaption, Half/full duplex and MDI/MDI-X auto detect

Gigabit fiber port: 1000Base-FX, SC/FC/ST, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm

POE Pin-out: 1/2(+), 3/6(-)

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Km

Single-mode: 1310nm, 20/40/60Km

1550nm, 80/100/120Km

LED indicators

Run indicator: Run

Interface indicator: Link (1~2)

Power supply indicator: PWR

LFP Alarm indicator: LFP

PoE indicator: POE

Power supply

Input Voltage: 48VDC (44~55)VDC

Type of input: 3 bits terminal block

No-load consumption: 2.3W@48VDC

Full-load consumption (full PD): 30W@48VDC

Working environment

Working temperature: -40~60°C

Storage temperature: -40~75°C

Relative Humidity: 5%~95 % (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail or Wall mounts

Weight: 390g

Size (W×H×D): 36mm×110mm×97mm

Industry Standards

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD)

EN61000-4-4 (EFT)

EN61000-4-5 (Surge)

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certifications

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Ordering Informations

IT-IPMC-101GT-GF(M)-POE: 1 port 10/100/1000Base-T(X) PoE + 1 port 1000Base-FX Multi-mode SC/ST/FC, 44-55VDC

IT-IPMC-101GT-GF(S)-POE: 1 port 10/100/1000Base-T(X) PoE + 1 port 1000Base-FX Single-mode SC/ST/FC, 44-55VDC

IT-IPMC-101GT-GF(SS)-POE: 1 port 10/100/1000Base-T(X) PoE + 1 port 1000Base-FX single-mode, single fiber SC/ST/FC, 44-55VDC

Packing List

1. Industrial media Converter (plus terminal block) ×1
2. User manual x 1
3. Certificate of quality x 1
4. Warranty card x 1
5. DIN-Rail mounting kit x 1