

IT-ES5024-IM-20F

4-ports 10/100M Ethernet + 20-ports 100Base-FX (SC/ST/FC)

Managed Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W.
- SW-Ring™ ring network patent technology (Fault recovery time<20ms).
- Support RSTP, way exchange time<50ms.
- Support static multicast, IGMP Snooping and GMRP.
- Support Port based VLAN and IEEE 802.1Q VLAN.
- Support QOS absolutely and opposite priority.
- Support rate control, Broadcast storm control.
- Support WEB, SNMP and Telnet configuration.
- Support MAC address learning, aging automatic.
- Support DHCP server and port frame statistics.
- Support email warning and relay warning.
- Support port status display, data update.
- Support configuration file up and download.
- Support 1 channel relay alarm output.
- Industrial grade 4 design, -40~75°C work temperature.
- IP30 protection grade, 19-inch rack mounting.
- No fan design.



Introduction


IT-ES5024-IM-20F is an industrial grade, managed and redundancy Ethernet switch which supports 4 Ethernet Ports and 20 Fiber ports. It provided some kinds of advanced network managed function, like as: SW-Ring™ redundancy ring network, VLAN, Trunking, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online. SW-Ring™ can bring your Ethernet to intelligent redundancy. Standard Industry design, can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage

power supply input.

Product complies with FCC and CE standards, in line with the industrial design requirements, for intelligent substation construction provides high-performance, high-quality products guaranteed. Support 1 channel power inputs and 1 relay alarm output, wide temperature range of -40~75°C to be able to meet the requirements of all kinds of industrial field, can be widely used in electric power, water conservancy, transportation, and other fields.

Dimensions

Unit (mm)

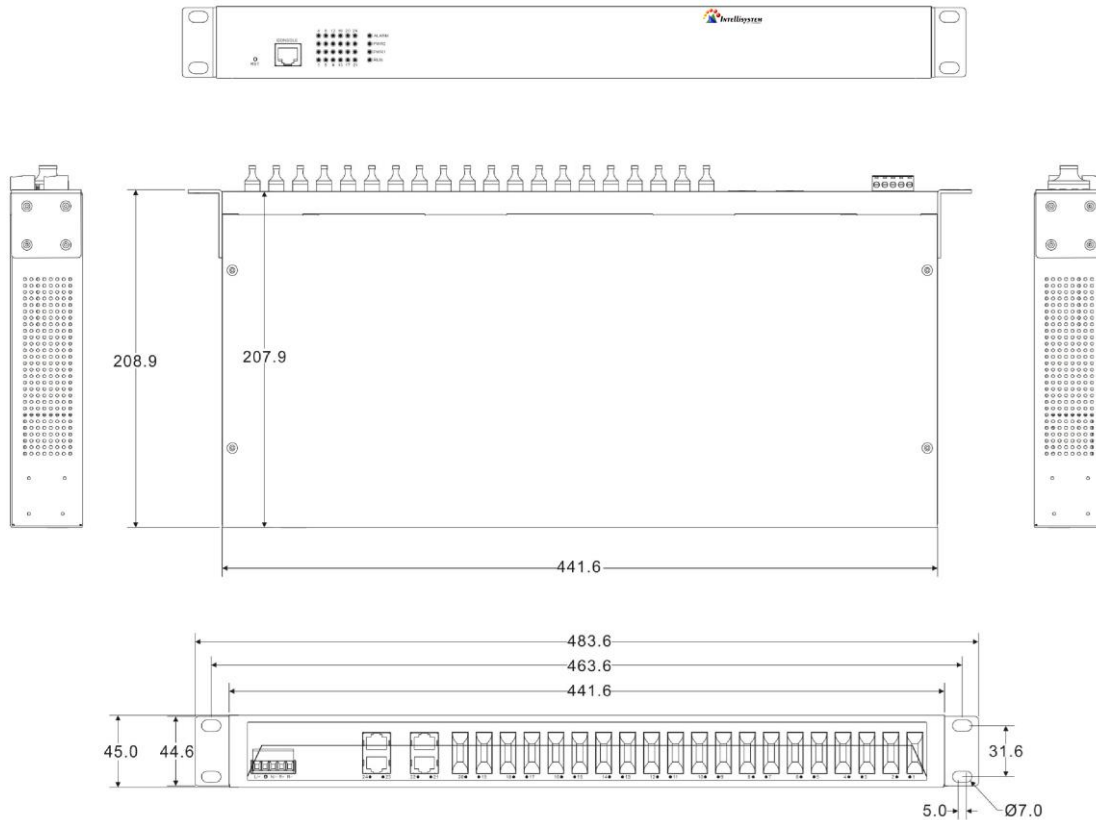

Specifications

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W, Protocol: ARP, ICMP, TCP, DHCP, DNS, HTTP, Telnet, SW-Ring™, RSTP, SNMP
 Flow control: IEEE802.3x flow control, back press flow control

Functions

Switch function: SW-Ring™, QOS, 802.1QVLAN, RSTP, SNMP port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics, upgrade online, up and download configuration file, user name access system
 SW-Ring: Support Single, Couple, Chain, Dual homing

Exchange attributes

100M forward speed: 148810pps
 100M maximum filter speed: 148810pps
 Transmit mode: store and forward
 System exchange bandwidth: 12.8G

MAC address table: 8K

Memory: 4M

Interfaces

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
 100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single-mode (20/40/60/80Km optional), multi-mode (2Km), wavelength: 1310nm, 1550nm
 Console port: debug serial port carry out CLI command
 Alarm port: 2 bit terminal block
 1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)
 Multi-mode: 1310nm, 2/5Km
 Single-mode: 1310nm, 20/40/60Km
 1550nm, 80/100/120Km

LED indicators

Run indicator: Run

Interface indicator: Link (1~24)

Power supply indicator: PWR

Alarm indicator: Alarm

Power supply

Input Voltage: 100~240VAC

Type of input: 3 bits terminal block

Overload current protect: 1.2A

Consumption

No-load consumption: 19.4W

Full-load consumption: 20.4W

Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95% (no condensation)

Mechanical Structure

Shell: IP30 protect grade, metal shell

Installation: 19" 1U rack

Size (W×H×D): 441.6mm×45mm×208.9mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certifications

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years**Ordering Informations****IT-ES5024-IM-20F (M):** 4 ports 10/100Base-T(X) + 20 ports 100Base-FX Multi-mode SC/ST/FC, 100-240VAC**IT-ES5024-IM-20F (S):** 4 ports 10/100Base-T(X) + 20 ports 100Base-FX Single-mode SC/ST/FC, 100-240VAC**IT-ES5024-IM-20F (SS):** 4 ports 10/100Base-T(X) + 20 ports 100Base-FX single-mode, single fiber SC/ST/FC, 100-240VAC**Packing List**

1. Ethernet switch IT-ES5024-IM-20F (plus terminal block) ×1
2. CD ×1
3. User manual ×1
4. Certificate of quality ×1
5. Warranty card ×1
6. Power cable ×1