

IT-IPS-3110-IU-2GC-4-POE 4-ports 10/100Base-T(x) (POE) + 4 ports 10/100Base-T(x) + 2 ports Gigabit Combo
Unmanaged Industrial POE Switch

Features

1. Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.3z/ab, IEEE802.3 af/at, store and forward.
2. Supports 2 Gigabit combo ports, 4 Fast Ethernet copper ports and 4 Fast Ethernet optic fiber ports.
3. Support IEEE802.3af standard, full-port (PoE) full 15.4W power supply.
4. Support IEEE802.3at standard, single-port maximum 30W power supply.
5. Ethernet port support 10/100M self-adaption.
6. DC48V power input, reverse connection protection.
7. Industrial grade design, -40-75°C work temperature.
8. IP40 protection grade, DIN rail mounted.



1

Introduction


IT-IPS-3110-IU-2GC-4-POE is an industrial grade, unmanaged Ethernet switch. The switch provides 4 ports 10/100M Ethernet, 4 ports 10/100M Ethernet(PoE) and 2 ports combo Gigabit SFP slots or 10/100/1000Base-T(X) ports, which 4 ports Ethernet supports POE function (IEEE802.3af/at). The switches are classified as power source equipment (PSE), and when used in this way, the switches enable centralization of the power supply, providing up to 30 watts of power per port and reducing the effort needed for installing power.

The switches can be used to power IEEE802.3af/at standard devices (PD), eliminating the need for additional wiring.

It support CE, FCC standard, adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input (48VDC). The -40~75°C working temperature, can meet all kinds of Industrial environment requirement, providing reliable and economic solution for your industrial Ethernet network.

Dimensions

Unit (mm)

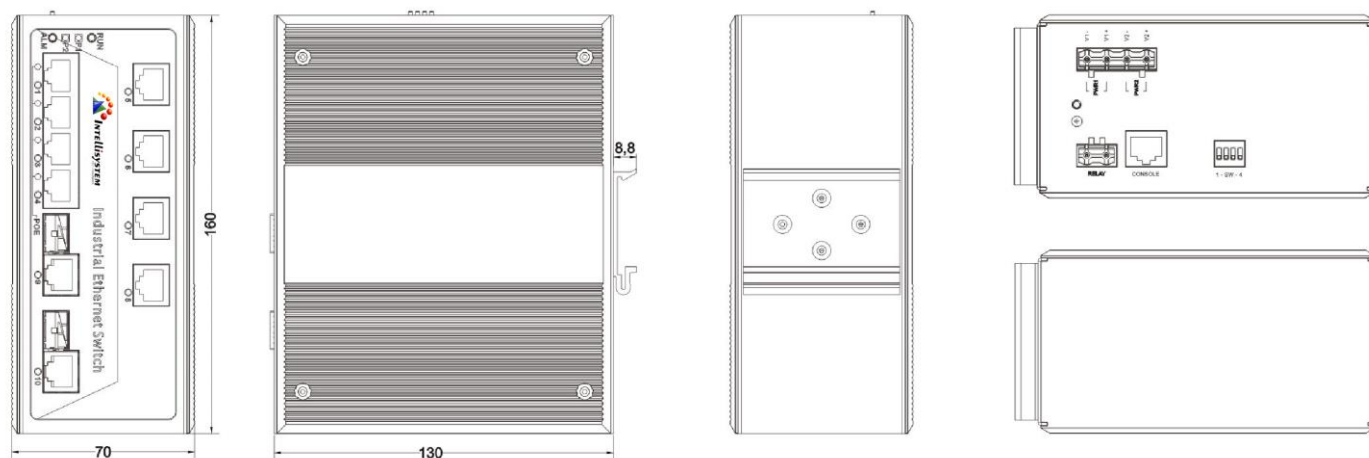

Specifications

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z/ab
Flow control: IEEE802.3x flow control, back press flow control
POE Standard: IEEE802.3af/at

Exchange attributes

100M forward speed: 148810pps
1000M forward speed: 1488100pps
Transmit mode: store and forward
System exchange bandwidth: 7.6G
MAC address table: 8K
Memory: 1M

Interfaces

Fast Ethernet Port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
PoE Pin-out: 1/2(+), 3/6(-)
Gigabit Combo port: 1000Base-X SFP slot or 10/100/1000Base-T(X)
Console port: debug serial port carry out CLI command
Alarm port: 2 bit 7.62mm terminal block
1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)
Multi-mode: 1310nm, 2Km
Single-mode: 1310nm, 20/40/60Km
1550nm, 80/100/120Km

LED indicators

Run indicator: Run
Interface indicator: Link (1~10)

POE indicator: 1~4

Power supply indicator: P1, P2

Alarm indicator: Alarm

Power supply

Input Voltage: 44~57VDC
Type of input: 4 bits 7.62mm terminal block
No-load consumption: 7W@48VDC
Full-load consumption: 68.6W@48VDC
Single PoE port maximum consumption: 30W@48VDC

Working environment

Working temperature: -40~75°C
Storage temperature: -40~85°C
Relative Humidity: 5%~95% (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell
Installation: DIN rail mount
Size (W×H×D): 70mm×160mm×130mm
Weight: 1.2kg

Industry Standards

EMI: FCC Part 15, CISPR (EN55022) class A
EMS: EN61000-4-2 (ESD)
EN61000-4-4 (EFT)
EN61000-4-5 (Surge)
Shock: IEC 60068-2-27
Free fall: IEC 60068-2-32
Vibration: IEC 60068-2-6

Warranty: 5 years

Packing List

1. Industrial PoE Switch (plus terminal block) ×1
2. User manual ×1
3. Certificate of quality ×1
4. Warranty card ×1
5. DIN-Rail mounting kit ×1