


# *ThermalTronix*

## TT-1640DLD-DS

### Thermal Imaging Camera

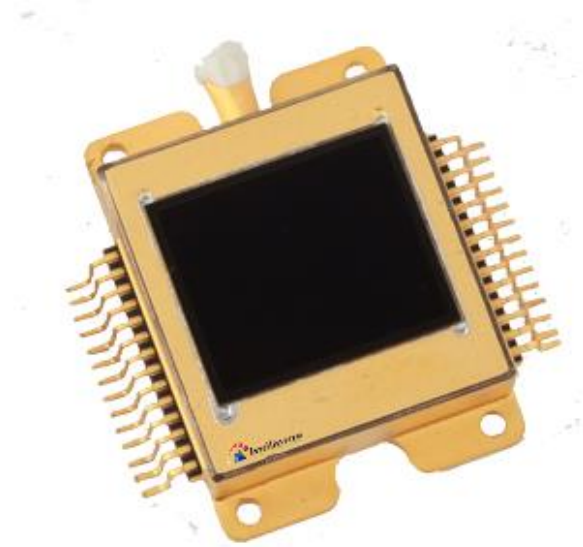

#### **FEATURES**

384×288 resolution (17um).

Frame rate 25~50Hz.

High uniformity, low thermal noise.

Short integral time, high sensitive.

Extended operating temperature range -40°C to 60°C.

Military standard qualification.

Fully self-intellectual property.

**Intellisystem Technologies S.r.l.**

Via Augusto Murri, 1 – 96100 Siracusa

Phone +39 (0)931-1756256 / +39 (0)2-87167549 - Mobile (+39) 335 1880035

em@il: info@intellisystem.it WEB: <http://www.intellisystem.it>

## DESCRIPTION

The Uncooled Micro-bolometer infrared FPA detector researched and developed by Intellisystem has already been applied in industrial production. It has the advantages of high resolution, high sensitivity, low thermal noise and fast response. The detector are much suitable for thermography, security surveillance, vehicle night vision and various other applications.

## SPECIFICATIONS

<b>Item</b>	<b><i>ThermalTronix TT-1640DLD-DS</i></b>
<b>Material</b>	Amorphous silicon
<b>Array size</b>	640×480
<b>Pixel pitch</b>	17μm
<b>Fill factor</b>	≥60%
<b>Spectral range</b>	8-14μm
<b>Temperature control</b>	TEC
<b>Frame rate</b>	25HZ (single), 50Hz (double)
<b>NETD</b>	≤60mK (f/1,300K,30-60Hz)
<b>Thermal time constant</b>	≤5ms
<b>Responsively</b>	≥8mV/K
<b>Operability</b>	≥99%
<b>Power supply</b>	5V
<b>Power consumption</b>	≤300mW (excluding TEC)
<b>Output</b>	single analog output
<b>Dimensions</b>	32mm×23.5mm×7.6mm (pin is not included)
<b>Weight</b>	≤20g
<b>Operating temperature</b>	-40°C ~ 60°C
<b>Storage temperature</b>	-40°C ~ 85°C
<b>Standards</b>	MIL-STD-810 and -883