

# IT-1645FIG30-HD-2MP IT-1645MIG30-HD-2MP IT-1645AIG30-HD-2MP

### 2.0 Megapixel HD Network IR 30M Bullet Camera

#### FEATURES


- HDTV Full Real-Time Transmission
- Support ONVIF, Built-in Auto Double Filter Switching Mechanism, True Day/Night
- Support 3D DNR, Mobile Surveillance, IR 30M, Weatherproof IP66
- Support WDR, Support DC12V/AC24V/POE

# LOW LUX

## SPECIFICATIONS

Model	Model No.		IT-1645FIG30-HD-2MP	IT-1645MIG30-HD-2MP	IT-1645AIG30-HD-2MP
	Туре		2 Megapixel HD Network IR 30M Bullet Camera		
Camera	Sensor		1/2.8" Progress Scan CMOS		
	Resolution	Main Stream	1920*1080, 1-25(30) FPS; 1280*720, 1-25(30) FPS		
	Resolution	Sub Stream	704*576, 1-25(30) FPS; 640*480, 1-25(30) FPS		
	Min. Illumination		Color 0.05Lux@F1.2;B/W 0Lux (IR ON)		
	IR Distance		30M,42pcs IR Leds		
	S/N Ratio		≥52db		
	WDR		≥120db		
	Electronic Shutter		1~ 1/10000 sec. Auto		
	Lens		6mm(3.6/8/12mmOpt ional) Fixed Lens	2.8-12mm Manual Zoom Lens	2.8-12mm Motorized Focus Lens
	Day & Night		IR Cut Optical Filter		
Audio/Video Setting	Video Compression		H.265/H.264 (Baseline, Main Profile)/M-JPEG Support Multiple Code Stream		
	Code Stream		32Kbps-16Mbps, Support CBR/VBR		
	Video Adjustment		Brightness/ Contrast / Chroma/ Saturation/ Sharpness / GAMMA		
	Intelligent Features		Intelligent Code Stream, Video Mask, Out-of-focus Detection, Intelligent Switch Control		
	Image Flip		Horizontal, Vertical, Horizontal & Vertical		
	Motion Detection		Support		
	Privacy Mask		Support		
	3D DNR		High/Medium/Low		
	OSD Setting		Support Channel Name, Date Time, Code Stream Overlay		
Network	Interface		10/100 M Ethernet (RJ-45)		
	Protocol		TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP		
	ONVIF		Support		
	Access Control		Administer and Common User		
	Web Browser		IE 6.0 and Above		
	Max. User Number		≤10		
General	CVBS/BNC		Support		
	RS485		Support		
	Audio I/O		Support		
	Alarm I/O		Support		
	Mobile Surveillance		Support		
	Working Conditions		-20°C ~ 60°C; 10% to 90% (Non-Condensing)		
	Power Supply		DC12V/AC24V/POE		
	Dimensions (mm)		315(L) x90(W)x100(H)mm		
	Weight (with package)		840g		

## 

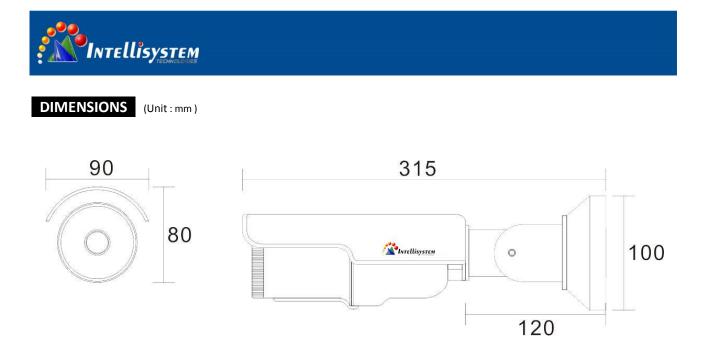

For Financial, Prison, Supermarket, Telecom, Government, School, Airport, Factory, Hotel and other Indoor/ Outdoor Places.