

IT-5645FIG50-HD-2MP

IT-1945MIG50-HD-2MP

IT-1945AIG50-HD-2MP

2.0 Megapixel HD Network IR 50M Bullet Camera



FEATURES


- HDTV 1080P Full Real Time Transmission
- Support ONVIF, Built-in Auto Double Filter Switching Mechanism, True Day/Night
- Support 3D DNR, Mobile Surveillance, IR 50M & 4pcs Array IR LED, Weatherproof IP66
- Support WDR, Support DC12V /AC24V/POE



SPECIFICATIONS

Model	Model No.	IT-5645FIG50-HD-2MP	IT-1945MIG50-HD-2MP	IT-1945AIG50-HD-2MP
	Type	2 Megapixel HD Network IR 50M Bullet Camera		
Camera	Sensor	1/3" Progress Scan CMOS		
	Resolution	Main Stream	1920*1080, 1-25(30) FPS; 1280*720, 1-25(30) FPS	
		Sub Stream	704*576, 1-25(30) FPS; 640*480, 1-25(30) FPS	
	Min. Illumination	Color 0.05Lux@F1.2; B/W 0 Lux (IR ON)		
	IR Distance	50M, 4pcs Array leds		
	S/N Ratio	≥52db		
	WDR	≥120db		
	Electronic Shutter	1~ 1/10000 sec. Auto		
Lens		12mm (6/8/16mm Optional) Fixed Lens	2.8-12mm Manual Zoom Lens	2.8-12mm Motorized Focus Lens
	Day & Night	IR Cut Optical Filter		
Audio/Video Setting	Video Compression	H.265/H.264 (Baseline, Main Profile)/M-JPEG, Support Multiple Code Stream		
	Code Stream	32Kbps-16Mbps, Support CBR/VBR		
	Video Adjustment	Brightness/ Contrast / Chroma/ Saturation/ Sharpness / GAMMA		
	Intelligent Features	Intelligent Code Stream, Video Mask, Out-of-focus Detection, Intelligent Switch Control		
	Image Flip	Horizontal, Vertical, Horizontal & Vertical		
	Motion Detection	Support		
	Privacy Mask	Support		
	3D DNR	High/Medium/Low		
Network	OSD Setting	Support Channel Name, Date Time, Code Stream Overlay		
	Interface	10/100 M Ethernet (RJ-45)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP		
	ONVIF	Support		
	Access Control	Administer and Common User		
	Web Browser	IE 6.0 and Above		
General	Max. User Number	≤10		
	CVBS/BNC	Support		
	RS485	Support		
	Audio I/O	Support		
	Alarm I/O	Support		
	Mobile Surveillance	Support		
	Working Conditions	-20°C ~ 60°C; 10% to 90% (Non-Condensing)		
	Power Supply	DC12V/AC24V/POE		
	Dimensions (mm)	345(L) x100(W)x100(H)mm		
Weight (with package)	990g			

DIMENSIONS (Unit : mm)

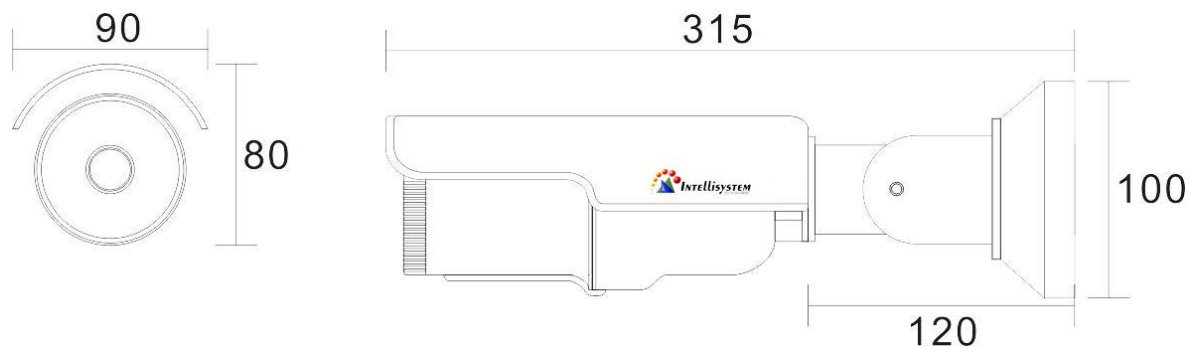

For Financial, Prison, Supermarket, Telecom, Government, School, Airport, Factory, Hotel and other Indoor/ Outdoor Places.