

IT-9647MIG30-HD-5MP IT-9647AIG30-HD-5MP

5.0 Megapixel HD Network Ultra Starlight IR 30M Bullet Camera



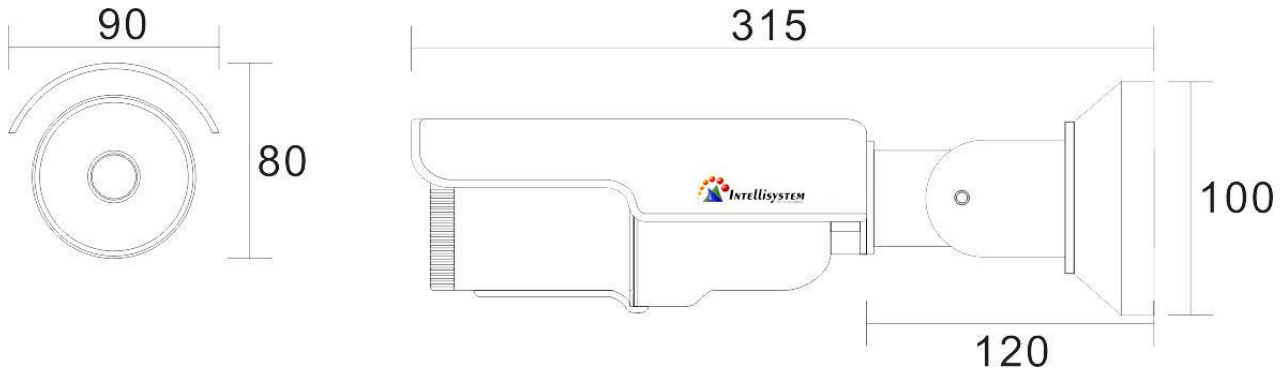
FEATURES

- Starlight Low Illumination
- H.265/H.264/M-JPEG, Support Multiple Code Stream
- HDTV, 5MP Full Real-Time Transmission
- Support ONVIF, Built-in Auto Double Filter Switching Mechanism, True Day/Night
- Support 3D DNR, Mobile Surveillance, IR 30M, 42pcs IR LED, Weatherproof IP66
- Support WDR, DC12V/AC24V/POE



SPECIFICATIONS

Model	Model No.	IT-9647MIG30-HD-5MP	IT-9647AIG30-HD-5MP
	Type	5.0 Megapixel HD Network Ultra Starlight IR 30M Bullet Camera	
Camera	Sensor	1/1.8" Scan CMOS	
	Resolution	Main	2592*1944, 1-25(30)FPS; 2560*1536, 1-25(30)FPS; 2560*1920, 1-25(30)FPS;
		Sub Stream	704*576, 1-25(30)FPS; 640*480, 1-25(30)FPS
	Min. Illumination	Color 0.005Lux@F1.2; B/W 0Lux@F1.2 (IR ON)	
	IR Distance	IR 30M, 42pcs IR LED	
	S/N Ratio	≥52db	
	WDR	≥120db	
	Electronic Shutter	1~ 1/10000 sec.	
	Lens	3.6-10mm 6MP Manual Zoom Lens (HD IR Lens)	3.6-10mm 6MP HD IR Motorized Focus Lens
Day & Night	IR Cut Optical Filter		
Audio/ Video Setting	Video Compression	H.265/H.264/M-JPEG, Support Multiple Code Stream	
	Code Stream	32Kbps-16Mbps, Support CBR/VBR	
	Video Adjustment	Brightness/ Contrast / Chroma/ Saturation/ Sharpness / GAMMA	
	Intelligent Features	Intelligent Code Stream, Video Mask, Out-of-focus Detection, Intelligent Switch Control	
	Image Flip	Horizontal, Vertical, Horizontal & Vertical	
	Motion Detection	Support	
	Privacy Mask	Support	
	3D DNR	High/Medium/Low	
Network	OSD Setting	Support Channel Name, Date Time, Code Stream Overlay	
	Interface	10/100 M Ethernet (RJ-45)	
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP	
	ONVIF	Onvif 2.4	
	Access Control	Administer and Common User	
	Web Browser	IE 6.0 and Above	
Interface	Max. User Number	≤10	
	CVBS/BNC	Support	
	Audio I/O	Support	
	Alarm I/O	Support	
	RS485	Support	
General	Mobile Surveillance	Support	
	IP Grade	IP66	
	Working Conditions	-20°C ~ 60°C; 10% to 90%, (Non-Condensing)	
	Power Supply	POE/DC12V/AC24V ±10%	
	Dimensions (mm)	315(L) x90(W)x100(H)mm	
	Weight (with package)	840g	

DIMENSIONS (Unit : mm)

For Financial, Prison, Supermarket, Telecom, Government, School, Airport, Factory, Hotel and Other Indoor /Outdoor Places.