

# IT-ES3016-IU Series

## Industrial Ethernet Switch

### User manual

#### 【Summarize】

IT-ES3016-IU series is a Plug-and-play unmanaged industrial Ethernet switch. The IT-ES3016-IU-P (12-48VDC) industrial Ethernet switches consists of 16 Ethernet ports. The IT-ES3016-IU-2F-P (12-48VDC) consists of 14 Ethernet ports and 2 Fiber ports. The IT-ES3016-IU-4F-P (12-48VDC) consists of 12 Ethernet ports and 4 Fiber ports. The IT-ES3016-IU-6F-P (12-48VDC) consists of 10 Ethernet ports and 6 Fiber ports. The IT-ES3016-IU-8F-P (12-48VDC) consists of 8 Ethernet ports and 8 Fiber ports that provide an economical solution for your industrial Ethernet connection.

Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 redundant power input and -40~75°C working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

#### 【Packing list】

Please check the packaging and accessories by your first using.

- Industrial Ethernet switch × 1
- User manual × 1
- Certificate of quality × 1
- Warranty card × 1


Please inform us or our distributor if your equipments have been damaged or lost any accessories, we will try our best to satisfy you.

#### 【Features】

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Support MAC address auto-learning, auto-aging
- Support 8K MAC address
- Support 12.8Gbps backboard bandwidth
- Support redundancy power supply(12~48VDC),
- Designed without fan
- -40~75°C work temperature
- IP30 protection grade
- DIN rail mount


## 【Panel layout】

### IT-ES3016-IU series

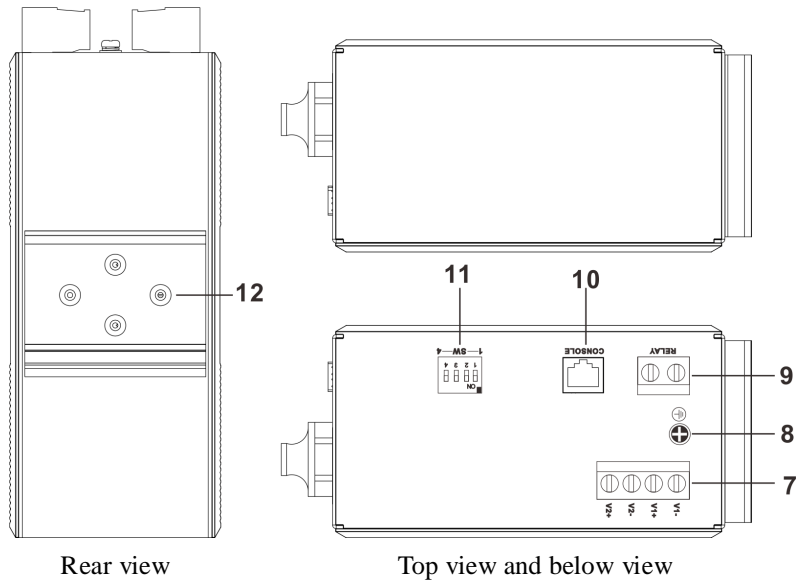


### IT-ES3016-IU-P (12-48VDC)

1. Systems running LED
2. The power LED
3. Relay alarm LED (Retain)
4. Link/ACT LEDs
5. 10/100BaseT(X) (RJ45) ports
7. Power input terminal block
8. Ground screw
9. Relay output terminal block(Retain)
10. Console port (Retain)
11. DIP switch (Retain)
12. DIN-Rail mount

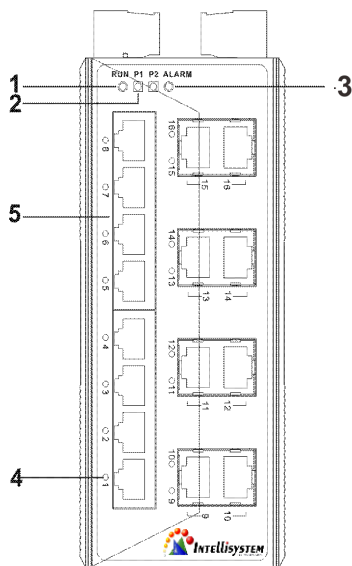


**IT-ES3016-IU-2F-P (12-48VDC)**

1. Systems running LED
2. The power LED
3. Relay alarm LED
4. Link/ACT LEDs
5. 10/100BaseT(X) (RJ45) ports
6. 100Base-FX ports
7. Power input terminal block
8. Ground screw
9. Relay output terminal block
10. Console port
11. DIP switch
12. DIN-Rail mount

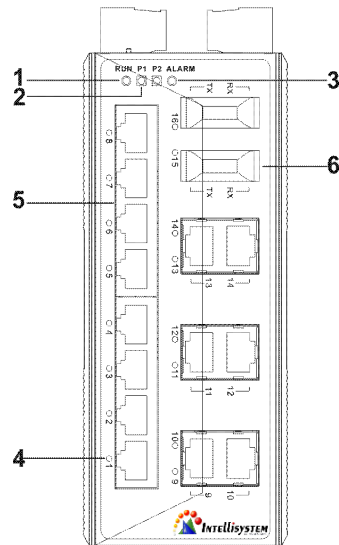

**IT-ES3016-IU-4F-P (12-48VDC)**

1. Systems running LED
2. The power LED
3. Relay alarm LED
4. Link/ACT LEDs
5. 10/100BaseT(X) (RJ45) ports
6. 100Base-FX ports
7. Power input terminal block
8. Ground screw
9. Relay output terminal block
10. Console port
11. DIP switch
12. DIN-Rail mount


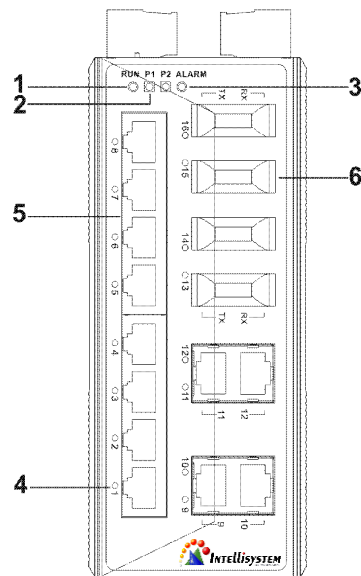


**IT-ES3016-IU-6F-P (12-48VDC)**


1. Systems running LED
2. The power LED
3. Relay alarm LED
4. Link/ACT LEDs
5. 10/100BaseT(X) (RJ45) ports
6. 100Base-FX ports
7. Power input terminal block
8. Ground screw
9. Relay output terminal block
10. Console port
11. DIP switch
12. DIN-Rail mount

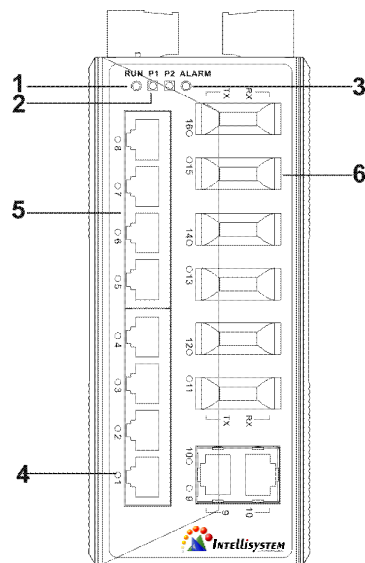
**IT-ES3016-IU-8F-P (12-48VDC)**

1. Systems running LED
2. The power LED
3. Relay alarm LED
4. Link/ACT LEDs
5. 10/100BaseT(X) (RJ45) ports
6. 100Base-FX ports
7. Power input terminal block
8. Ground screw
9. Relay output terminal block
10. Console port
11. DIP switch
12. DIN-Rail mount

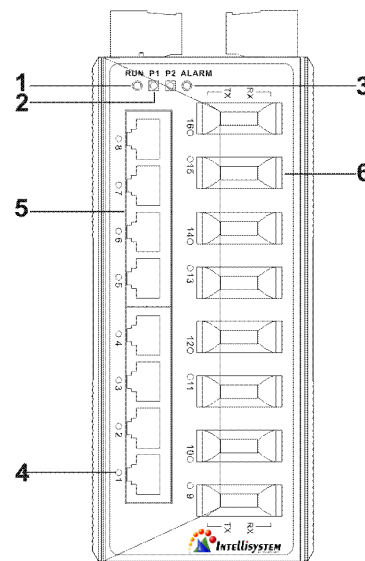
**【Power supply input】**


Front view



Top view

IT-ES3016-IU series front panel provided 4 bit power supply input terminal block, support DC input. DC power supply input supported redundancy function, provided PWR1 and PWR2 power input, can use for single, and can connect 2 separately power supply system, use 1 pair terminal block connect the device at the same time. If one of the power systems broke, the device can work un-interruptible. Built-in overcorrect protection, Reverse connection protection. Voltage input range is 12~48VDC (terminal block defined as: V1-, V1+, V2-, V2+).


Important notice:

1. Power ON operation: first of all, insert power cable's terminal block into device's power port, then insert power supply plug into power source
2. Power OFF operation: First off all, unpin power plug, then strike the terminal block, please take care of operation sequence.

## 【Appearance and dimensions】

This series of dimensions length width height, between product series port number is different.


Unit (mm)

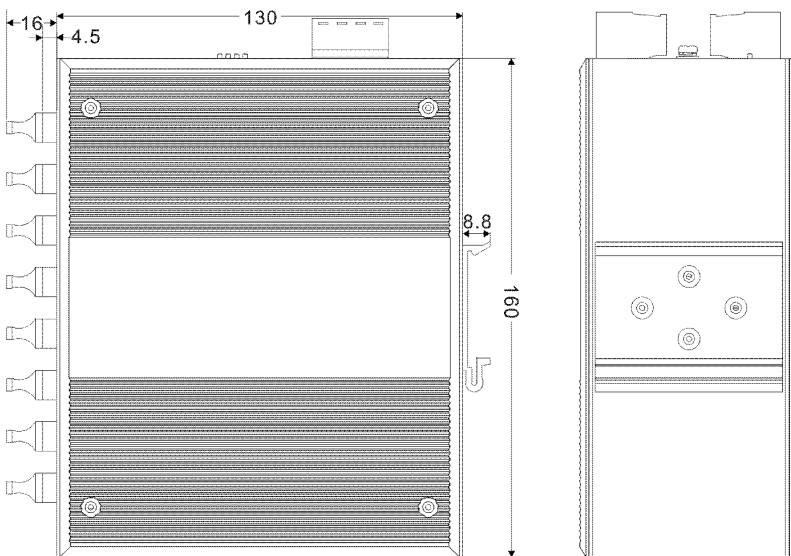


## 【Communication connector】

### 10/100BaseT(X) Ethernet port

The pinout of RJ45 port display as below, connect by UTP or STP. The connect distance is no more than 100m. 100Mbps is used 120Ω of UTP 5; 10Mbps is used 120Ω of UTP 3, 4, 5.

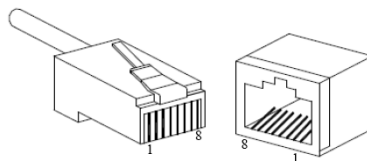


RJ 45 port support automatic MDI/MDI-X operation. Can connect the PC, Server, Converter and HUB .Pin 1,2,3,6 Corresponding connections in MDI. 1→3, 2→6, 3→1, 6→2 are used as cross wiring in the MDI-X port of Converter and HUB. 10Base-T/100Base-TX are used in MDI/MDI-X, the define of Pin in the table as below.




NO.	MDI signal	MDI-X signal
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4, 5, 7, 8	—	—

Note: “TX±”Transmit Data±, “RX±”Receive Data±, “—”Not Use.

### MDI (straight-through cable)

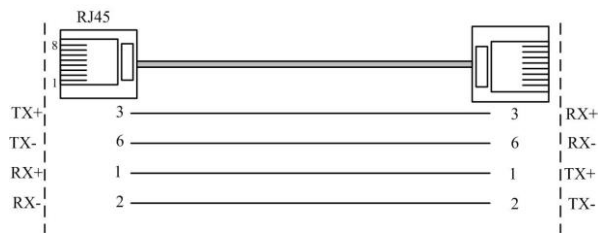

### MDI-X (Cross over cable)

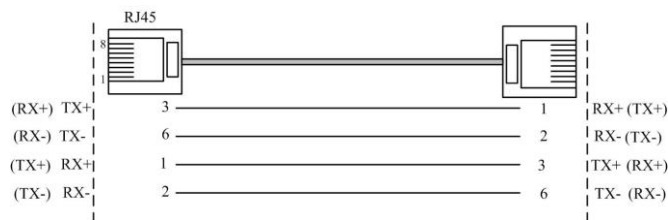


MDI/MDI-X auto connection makes switch easy to use for customers without considering the type of network cable.

### 100Base-FX Fiber port

100Base-FX full-duplex SM or MM port, SC/ST/FC type .The fiber port must be used in pair, TX (transmit) port connect remote switch's RX (receive) port; RX (receive) port connect remote switch's TX (transmit) port.

The optical fiber connection supports the line to instruct enhance the reliability of network effectively.

**Suppose:** If you make your own cable, we suggest labeling the two sides of the same line with the same letter (A-to-A and B-to-B, shown as below, or A1-to-A2 and B1-to-B2).

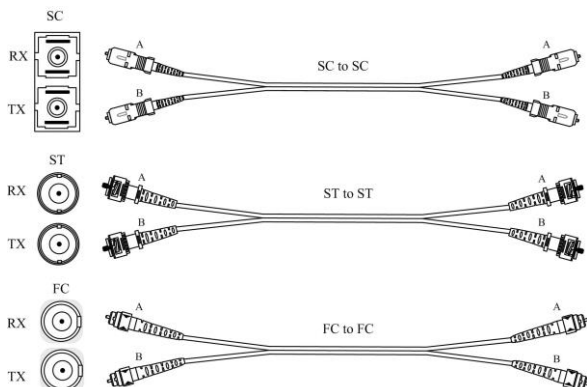

## 【LED Indicators】

LED indicator light on the front panel of product, the function of each LED is described in the table as below.

System Indication LED		
LED	State	Description
<b>PWR</b> (P1, P2)	ON	Power is being supplied to power input PWR input
	OFF	Power is <b>not</b> being supplied to power input PWR input
<b>RUN</b>	ON/OFF	System is not running well
	Blinking	System is running well
<b>Link/ACT</b> (1~16)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active

## 【Installation】


Before installation, confirm that the work environment meet the installation require, including the power needs and abundant space. Whether it is close to the connection equipment and other equipments are prepared or not.

1. Avoid in the sunshine, keep away from the heat fountainhead or the area where in intense EMI.
2. Examine the cables and plugs that installation requirements.
3. Examine whether the cables be seemly or not (less than 100m) according to reasonable scheme.
4. Power: 12~48VDC power input
5. Environment: working temperature -40~75 °C  
Storage Temperature: -40~85 °C  
Relative humidity 5%~95%

### DIN-rail installation

In order to apply for industrial environments conveniently, IES6116 series adopts 35mm DIN-Rail installation, the installation steps are as follows:

1. Examine the DIN-Rail accessories
2. Examine DIN Rail is firm or not and the position is suitable or not.
3. Insert the top of the DIN-Rail into the slot just below the stiff metal spring.
4. The DIN-Rail attachment unit will snap into place as shown below.

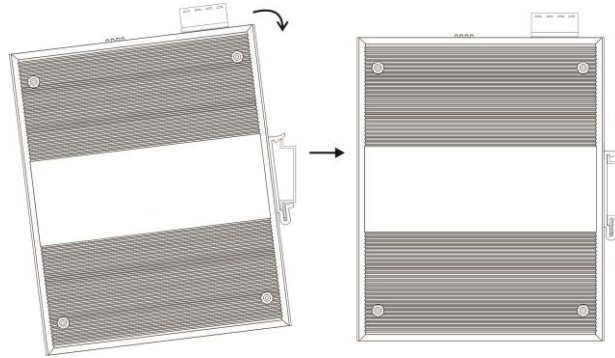

## Wiring Requirements

Cable laying need to meet the following requirements,

1. It is needed to check whether the type, quantity and specification of cable match the requirement before cable laying;
2. It is needed to check the cable is damaged or not, factory records and quality assurance booklet before cable laying;
3. The required cable specification, quantity, direction and laying position need to match construction requirements, and cable length depends on actual position;
4. All the cable cannot have break-down and terminal in the middle;
5. Cables should be straight in the hallways and turning;
6. Cable should be straight in the groove, and cannot beyond the groove in case of holding back the inlet and outlet holes. Cables should be banded and fixed when they are out of the groove;
7. User cable should be separated from the power lines. Cables, power lines and grounding lines cannot be overlapped and mixed when they are in the same groove road. When cable is too long, it cannot hold down other cable, but structure in the middle of alignment rack;
8. Pigtail cannot be tied and swerved as less as possible. Swerving radius cannot be too small (small swerving causes terrible loss of link). Its banding should be moderate, not too tight, and should be separated from other cables;
9. It should have corresponding simple signal at both sides of the cable for maintaining.

## 【Specifications】

### Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x,

### Exchange attributes

100M forward speed: 148810pps

Transmit mode: store and forward

System exchange bandwidth: 12.8G

MAC address table: 8K

Memory: 4M

### Interfaces

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional) , multi mode (2Km), wavelength: 1310nm, 1550nm

Alarm port: 2 bit terminal block (Retain)



**Transfer distance:**

Twisted cable: 100M (standard CAT5/CAT5e cable)  
Multi-mode: 1310nm, 2/5Km  
Single-mode: 1310nm, 20/40/60Km  
1550nm, 80/100/120Km

**LED indicators:**

Run indicator: Run  
Interface indicator: Link (1~16)  
Power supply indicator: PWR (P1, P2)  
Alarm indicator: Alarm (Retain)

**Power supply**

Input voltage: 12~48VDC  
Type of input: 4 bit terminal block  
Overload Current Protection: 1.2A  
Support DC dual power supply redundancy

**Consumption**

➤IT-ES3016-IU-P (12~48VDC):

Unload consumption: 4.83W@24VDC  
Full load consumption: 7.30W@24VDC

➤IT-ES3016-IU-2F-P (12~48VDC):

Unload consumption: 6.12W@24VDC  
Full load consumption: 8.33W@24VDC

➤IT-ES3016-IU-4F-P (12~48VDC):

Unload consumption: 7.6W@24VDC  
Full load consumption: 9.29W@24VDC

➤IT-ES3016-IU-6F-P (12~48VDC):

Unload consumption: 8.79W@24VDC  
Full load consumption: 10.49W@24VDC

➤IT-ES3016-IU-8F-P (12~48VDC):

Unload consumption: 10.18W@24VDC  
Full load consumption: 10.26W@24VDC

**Working environment:**

Working temperature: -40~75°C  
Storage temperature: -40~85°C  
Relative Humidity: 5%~95% (no condensation)

**Mechanical Structure:**

Shell: IP30 protect grade, metal shell  
Installation: DIN Rail  
Size (W×H×D) : 160mm×70mm×130mm

**Industry Standards:**

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

**Certifications**

CE, FCC, RoHS, PAL, UL508 (Pending)

**Warranty:** 5 years