

# IT-IPS-215-IU-4-POE

4-ports 10/100M Base-T(x) PoE + 1-port 10/100M Base-T(x)

Unmanaged Industrial PoE Switch

## Features

1. Support 4 10/100Base-TX POE ports and 1 10/100Base-TX Ethernet port.
2. Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3 af/at, store and forward.
3. Support IEEE802.3af standard, full-port (PoE) full 15.4W power supply.
4. Support IEEE802.3at standard, single-port maximum 30W power supply.
5. 4 Fast Ethernet port (1~4) support POE function.
6. Ethernet port support 10/100M self-adaption.
7. DC48V power input, reverse connection protection.
8. IP40 protect grade, high strength iron shell, DIN Rail installation.
9. Industrial grade 4 design.



1

## Introduction


The IT-IPS-215-IU-4-POE switch is a kind of unmanaged industrial PoE switch, it support 5 10/100Base-T(X) ports. The 4 Fast Ethernet ports (1~4) support Power-over Ethernet (PoE) function. The switches are classified as power source equipment (PSE), and when used in this way, the IT-IPS-215-IU-4-POE switches enable centralization of the power supply, providing up to 30 watts of power per port and reducing the effort needed for installing power. The switches can be used to power IEEE802.3af/at standard devices (PD),

eliminating the need for additional wiring.

It support CE, FCC standard, IT-IPS-215-IU-4-POE adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input (48VDC). The switch support IEEE802.3/IEEE802.3u/IEEE802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing reliable and economic solution for your industrial Ethernet network.

## Dimensions

Unit (mm)

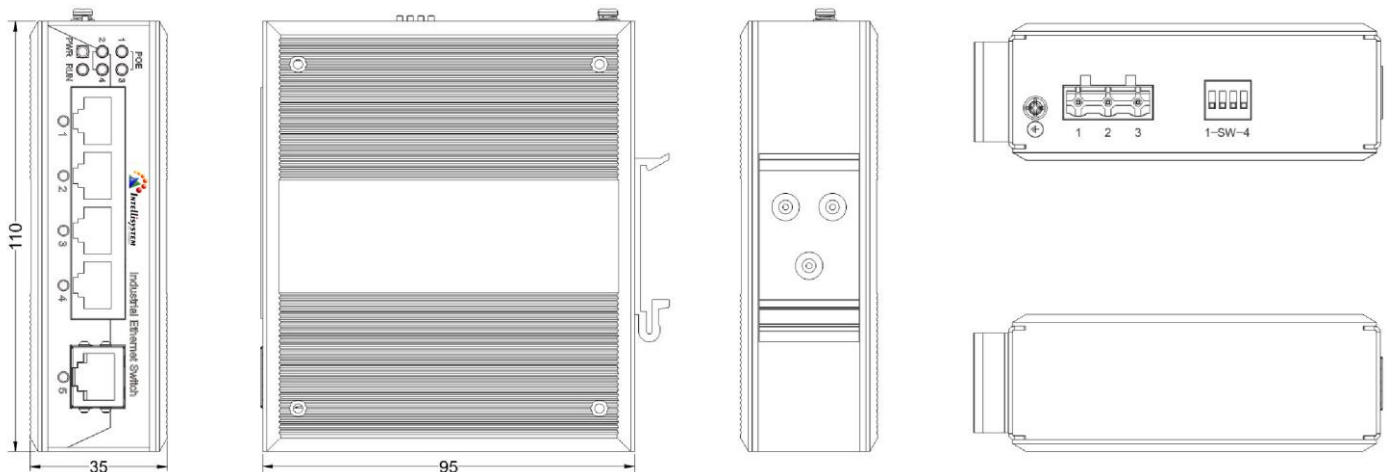

## Specifications

### Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at

Flow control: IEEE802.3x flow control, back press flow control

### Exchange attributes

100M forward speed: 148810pps

Transmit mode: store and forward

MAC address table: 2K

Bandwidth: 2.0G

### Interfaces

RJ45 port: 10Base-T/100Base-TX/1000Base-TX Self-adaption,

Half/full duplex and MDI/MDI-X auto detect

POE Pin-out: 1/2(+), 3/6(-)

### Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

### LED indicators

Interface indicator: Link (1~5)

Power supply indicator: PWR

Run indicator: Run

PoE indicator: POE (1~4)

### Power supply

Input Voltage: 48VDC (45~55VDC)

Type of input: 3 bits terminal block

Un-load consumption: 2.26W @48VDC

Full-load consumption: 73.97W @48VDC

Single PoE port maximum consumption: 30W @48VDC

### Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95% (no condensation)

### Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail

Weight: 370g

Size (W×H×D): 35mm×110mm×95mm

### Industry Standards

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 2

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

### Certifications

CE, FCC, RoHS, UL508 (Pending)

**Warranty:** 5 years

## Packing List

1. Industrial PoE Switch (plus terminal block) ×1
2. User manual ×1
3. Certificate of quality ×1
4. Warranty card ×1
5. DIN-Rail mounting kit ×1